



DATA SHEET

HYDROCYCLONE FILTER HYDROCYCLONE SEPARATOR (HID)



1. HYDROCYCLONE SEPARATOR (HID)

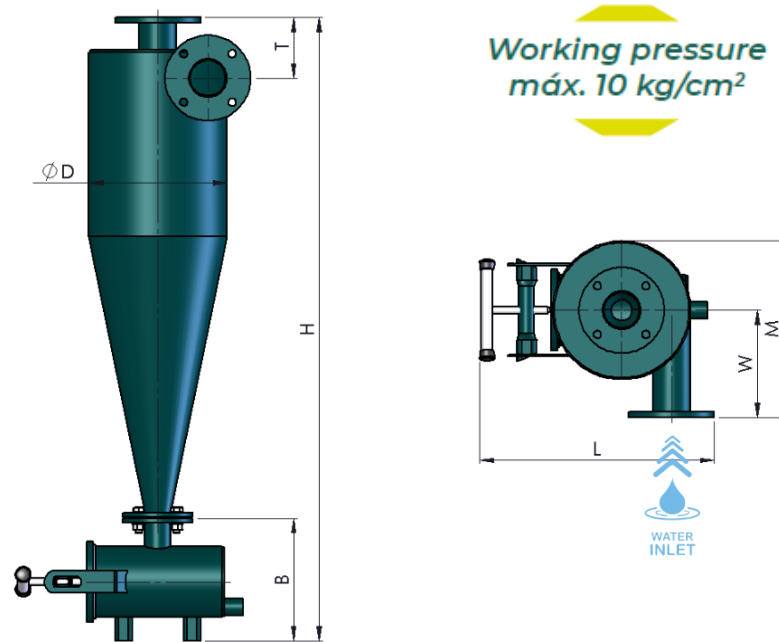


IMAGE 1

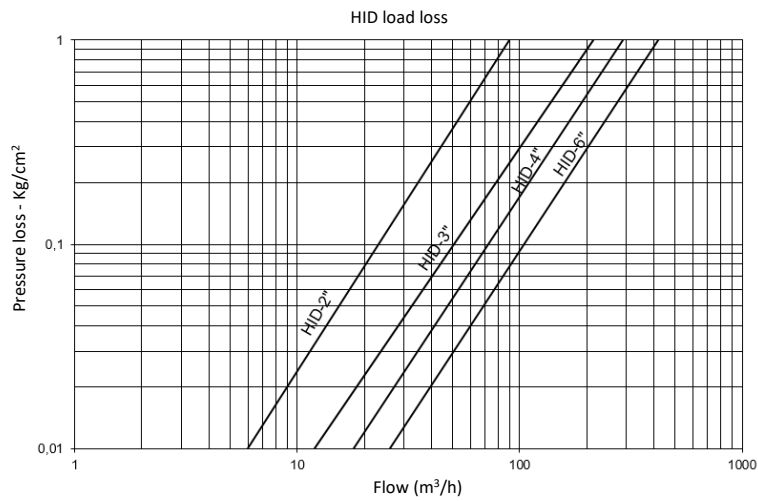


CHART 1

MODEL	$\phi I / \phi O$	Flow (m ³ /h)	Net Weight (kg)	Dimensions (mm)						
				H	ϕD	W	M	L	B	T
HID - 2" Thread	Male Thread 2"	24	34	1130	220	250	360	533	285	141
HID - 3"	Flange 3"	51	54	1454	323	250	412	550	285	141
HID - 4"	Flange 4"	74	124	1666	406	290	494	590	285	151
HID - 6"	Flange 6"	119	176	1850	610	450	755	693	380	290

*Ask about other pressures

2. MANUFACTURING TECHNICAL CHARACTERISTICS

- Materials:
 - Carbon steel metal components.
 - Zinc plated screws 6.8.
 - EPDM gaskets: 60 SHORE.

- Surface treatment:
 - Surface shot blasting up to grade SA 2½.
 - Two-layer EPOXY-POLYESTER powder paint finish, oven-polymerized RAL 6004.

- Working characteristics:
 - Maximum operating temperature 50°C.



Water Solutions



INTRAMESA MZ S.A.



Polígono Armentera P-99

22400 Monzón (Huesca)

www.itmfilters.com

info@itmfilters.com

Tel. 974 10 50 05